


## Technical Data

Resistance at 0°C (R <sub>0</sub> )	100 Ω
Temperature coefficient (0°C up to +100°C)	3.85 · 10 <sup>-3</sup> K <sup>-1</sup>
Tolerance classes according to DIN EN 60751	<ul style="list-style-type: none"> <li>• F 0,1 (0°C - +150°C)</li> <li>• F 0,15 (-30°C - +300°C)</li> <li>• F 0,3 (-50°C - +500°C)</li> <li>• F 0,6 (-50°C - +600°C)</li> </ul>
Operating temperature range depending on lead material:	
AgPd5, Au-coated Ni-wire	-50 °C up to +400 °C
Pt-coated Ni-wire	-50 °C up to +500 °C (short-time up to +550 °C)
Pt	-50 °C up to +600 °C
Measurement current (DC) at 25 °C	1 mA
Maximal permissible peak current (DC) at 25 °C	3 mA
Insulation resistance	> 10 MΩ
Self-heating at 0 °C	< 0.5 K / mW
Thermal response time	
Flowing water (v = 0.2 m/s)	T <sub>0,5</sub> = 0.07 s, T <sub>0,9</sub> = 0.2 s
Flowing air (v = 1 m/s)	T <sub>0,5</sub> = 4 s, T <sub>0,9</sub> = 10 s
Resistance value R <sub>t</sub> [Ω] at temperature t	
	Tolerance class
t	F 0,1 [Ω]   F 0,15 [Ω]   F 0,3 [Ω]   F 0,6 [Ω]
0 °C	100±0.04   100±0.06   100±0.12   100±0.24
+100 °C	138.51±1   138.51±1.3   138.51±3   138.51±6

R <sub>t</sub> measuring point	2 mm from wire end																								
Maximal Resistance Change at UCT 250 h	< 0.1 %																								
Specification	DIN EN 60751																								
Type	Film sensor																								
<b>Technology:</b> Advanced thin-film-technology (ceramic carrier with a structured platinum layer, covered with a passivation layer)																									
<b>Operating conditions:</b> Unprotected application only in dry environments without any contamination																									
<b>Conformity:</b> 2011/65/EU Restriction of the use of Hazardous Substances Directive (RoHS)																									
Dimensions [mm]																									
<b>Please note</b> Leads are not angled ex works.																									
	<table border="1"> <tr> <td></td> <td>FMA- 2105 2x2.3x1.3</td> <td>FMA- 2105 2x2.3x1.0</td> <td>Leads</td> <td>AgPd5</td> <td>NiAu</td> <td>NiPt</td> <td>Pt</td> </tr> <tr> <td>H1 [mm]</td> <td>1.3 ± 0.2</td> <td>1 ± 0.2</td> <td>l [mm]</td> <td>15 ± 1</td> <td>15 ± 1</td> <td>10 ± 1</td> <td>7 ± 1</td> </tr> <tr> <td>H2 [mm]</td> <td>0.65</td> <td>0.4</td> <td>d [mm]</td> <td>0,25</td> <td>0,2</td> <td>0,2</td> <td>0,2</td> </tr> </table>		FMA- 2105 2x2.3x1.3	FMA- 2105 2x2.3x1.0	Leads	AgPd5	NiAu	NiPt	Pt	H1 [mm]	1.3 ± 0.2	1 ± 0.2	l [mm]	15 ± 1	15 ± 1	10 ± 1	7 ± 1	H2 [mm]	0.65	0.4	d [mm]	0,25	0,2	0,2	0,2
	FMA- 2105 2x2.3x1.3	FMA- 2105 2x2.3x1.0	Leads	AgPd5	NiAu	NiPt	Pt																		
H1 [mm]	1.3 ± 0.2	1 ± 0.2	l [mm]	15 ± 1	15 ± 1	10 ± 1	7 ± 1																		
H2 [mm]	0.65	0.4	d [mm]	0,25	0,2	0,2	0,2																		

## Functional performance

according to DIN EN 60751

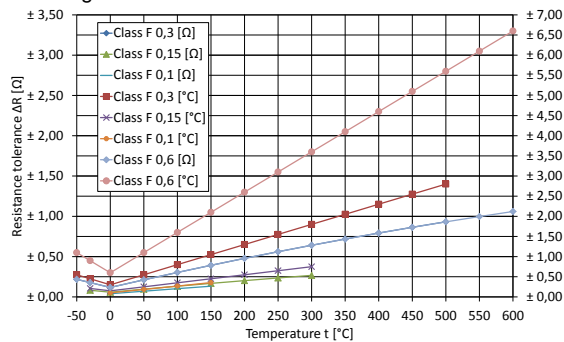

Picture 1: Resistance and temperature tolerances of Pt100 (Please note - the operating temperature range depends on lead material!)

Temperature range from -50 °C up to 0 °C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2 + C \cdot (t - 100 \text{ °C}) \cdot t^3)$$

Temperature range from 0°C up to +600°C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2)$$

Tolerance classes according to DIN EN 60751:

Class F 0,1 (0°C - +150°C):  $\Delta t = \pm (0.1 + 0.0017 \cdot |t|)$

Class F 0,15 (-30°C - +300°C):  $\Delta t = \pm (0.15 + 0.002 \cdot |t|)$

Class F 0,3 (-50°C - +500°C):  $\Delta t = \pm (0.3 + 0.005 \cdot |t|)$

Class F 0,6 (-50°C - +600°C):  $\Delta t = \pm (0.6 + 0.01 \cdot |t|)$

Whereby:

R<sub>t</sub> ... Resistance [Ω] at temperature t

R<sub>0</sub> ... Resistance [Ω] at 0 °C

t ... Temperature [°C]

Δt ... Permissible temperature deviation at t [°C]

$$A = 3.9083 \cdot 10^{-3} \text{ °C}^{-1}$$

$$B = -5.775 \cdot 10^{-7} \text{ °C}^{-2}$$

$$C = -4.183 \cdot 10^{-12} \text{ °C}^{-4}$$



Fields of application

- Industrial electronics
- Building automation
- Automotive electronics
- Energy and environmental engineering
- Safety and medical engineering

Ordering examples

Construction	Class of accuracy	Leads (∅ d x l [mm] lead material)	Operating temperature range [°C]
FMA- 2105 2x2,3x1.3	F 0,15	0.25x15 AgPd5	-50/+400
FMA- 2105 2x2,3x1.0	F 0,3	0.2x10 NiAu	-50/+400
FMA- 2105 2x2,3x1.0	F 0,6	0.25x15 AgPd5	-50/+400

Other classes of accuracy and wire lengths are available on request.



UST Umweltsensortechnik GmbH  
is certified according to




## Technical Data

Resistance at 0°C (R <sub>0</sub> )	1000 Ω
Temperature coefficient (0°C up to +100°C)	3.85 · 10 <sup>-3</sup> K <sup>-1</sup>
Tolerance classes according to DIN EN 60751	<ul style="list-style-type: none"> <li>• F 0,1 (0°C - +150°C)</li> <li>• F 0,15 (-30°C - +300°C)</li> <li>• F 0,3 (-50°C - +500°C)</li> <li>• F 0,6 (-50°C - +600°C)</li> </ul>
Operating temperature range depending on lead material:	
AgPd5, Au-coated Ni-wire	-50 °C up to +400 °C
Pt-coated Ni-wire	-50 °C up to +500 °C (short-time up to +550 °C)
Pt	-50 °C up to +600 °C
Measurement current (DC) at 25 °C	0.1 mA
Maximal permissible peak current (DC) at 25 °C	0.3 mA
Insulation resistance	> 10 MΩ
Self-heating at 0 °C	< 0.5 K / mW
Thermal response time	
Flowing water (v = 0.2 m/s)	T <sub>0,5</sub> = 0.07s, T <sub>0,9</sub> = 0.2s
Flowing air (v = 1 m/s)	T <sub>0,5</sub> = 4 s, T <sub>0,9</sub> = 10 s
Resistance value R <sub>t</sub> [Ω] at temperature t	
	Tolerance class
t	F 0,1 [Ω]   F 0,15 [Ω]   F 0,3 [Ω]   F 0,6 [Ω]
0 °C	1000±0.4   1000±0.6   1000±1.2   1000±2.4
+100 °C	1385.1±1   1385.1±1.3   1385.1±3   1385.1±6

R <sub>t</sub> measuring point	2 mm from wire end
Maximal Resistance Change at UCT 250 h	< 0.1 %
Specification	DIN EN 60751
Type	Film sensor
<b>Technology:</b> Advanced thin-film-technology (ceramic carrier with a structured platinum layer, covered with a passivation layer)	
<b>Operating conditions:</b> Unprotected application only in dry environments without any contamination	
<b>Conformity:</b> 2011/65/EU Restriction of the use of Hazardous Substances Directive (RoHS)	
Dimensions [mm]	
<b>Please note</b> Leads are not angled ex works.	
	Tolerance class
	F 0,1 [Ω]   F 0,15 [Ω]   F 0,3 [Ω]   F 0,6 [Ω]
FMA- 2145 2x2.3x1.3	FMA- 2145 2x2.3x1.0
Leads	AgPd5   NiAu   NiPt   Pt
H1 [mm]	1.3 ± 0.2   1 ± 0.2   1 [mm]   15 ± 1   15 ± 1   10 ± 1   7 ± 1
H2 [mm]	0.65   0.4   d [mm]   0,25   0,2   0,2   0,2

## Functional performance

according to DIN EN 60751

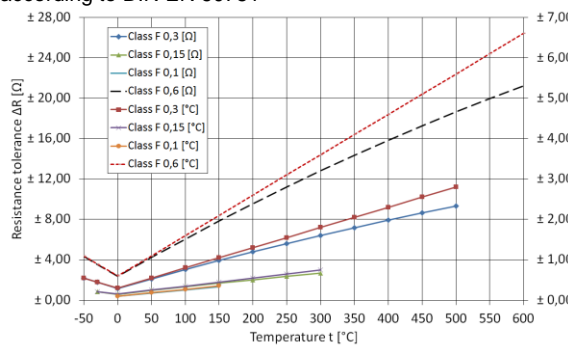

Picture 1: Resistance and temperature tolerances of Pt1000 (Please note - the operating temperature range depends on lead material!)

Temperature range from -50 °C up to 0 °C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2 + C \cdot (t - 100 \text{ °C}) \cdot t^3)$$

Temperature range from 0°C up to +600°C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2)$$

Tolerance classes according to DIN EN 60751:

Class F 0,1 (0°C - +150°C):  $\Delta t = \pm (0.1 + 0.0017 \cdot |t|)$

Class F 0,15 (-30°C - +300°C):  $\Delta t = \pm (0.15 + 0.002 \cdot |t|)$

Class F 0,3 (-50°C - +500°C):  $\Delta t = \pm (0.3 + 0.005 \cdot |t|)$

Class F 0,6 (-50°C - +600°C):  $\Delta t = \pm (0.6 + 0.01 \cdot |t|)$

Whereby:

R<sub>t</sub> ... Resistance [Ω] at temperature t

R<sub>0</sub> ... Resistance [Ω] at 0 °C

t ... Temperature [°C]

Δt ... Permissible temperature deviation at t [°C]

$$A = 3.9083 \cdot 10^{-3} \text{ °C}^{-1}$$

$$B = -5.775 \cdot 10^{-7} \text{ °C}^{-2}$$

$$C = -4.183 \cdot 10^{-12} \text{ °C}^{-4}$$


Fields of application

- Industrial electronics
- Building automation
- Automotive electronics
- Energy and environmental engineering
- Safety and medical engineering

Ordering examples

Construction	Class of accuracy	Leads (∅ d x l [mm] lead material)	Operating temperature range [°C]
FMA- 2145 2x2,3x1.3	F 0,15	0.25x15 AgPd5	-50/+400
FMA- 2145 2x2,3x1.0	F 0,3	0.2x10 NiAu	-50/+400
FMA- 2145 2x2,3x1.0	F 0,6	0.25x15 AgPd5	-50/+400

Other classes of accuracy and wire lengths are available on request.

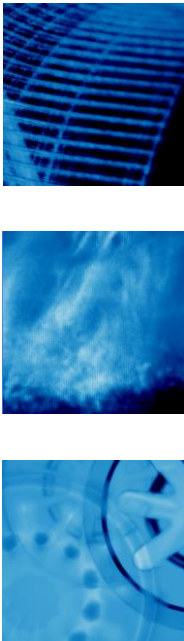

UST Umweltsensortechnik GmbH is certified according to



铂基传感 BOJSENSING


## Technical Data

Resistance at 0°C	1000 Ω			
Temperature coefficient (0°C up to +100°C)	$3.85 \cdot 10^{-3} \text{ K}^{-1}$			
Tolerance classes according to DIN EN 60751	<ul style="list-style-type: none"> <li>• F 0,1 (0°C - +150°C)</li> <li>• F 0,15 (-30°C - +300°C)</li> <li>• F 0,3 (-50°C - +500°C)</li> <li>• F 0,6 (-50°C - +600°C)</li> </ul>			
Operating temperature range depending on lead material:				
AgPd5, Au-coated Ni-wire	-50 °C up to +400 °C			
Pt-coated Ni-wire	-50 °C up to +500 °C (short-time up to +550 °C)			
Pt	-50 °C up to +600 °C			
Measurement current (DC) at 25 °C	0.1 mA			
Maximal permissible peak current (DC) at 25 °C	0.3 mA			
Insulation resistance	> 10 MΩ			
Self-heating at 0 °C	< 0.5 K / mW			
Thermal response time				
Flowing water (v = 0.2 m/s)	$T_{0,5} = 0.07\text{s}$ , $T_{0,9} = 0.3\text{s}$			
Flowing air (v = 1 m/s)	$T_{0,5} = 6\text{s}$ , $T_{0,9} = 20\text{s}$			
Resistance value $R_t$ [Ω] at temperature t				
	Tolerance class			
t	F 0,1 [Ω]	F 0,15 [Ω]	F 0,3 [Ω]	F 0,6 [Ω]
0 °C	1000±0.4	1000±0.6	1000±1.2	1000±2.4
+100 °C	1385.1±1	1385.1±1.3	1385.1±3	1385.1±6

$R_t$ measuring point	2 mm from wire end																								
Maximal Resistance Change at UCT 250 h	< 0.1 %																								
Specification	DIN EN 60751																								
Type	Film sensor																								
<b>Technology:</b> Advanced thin-film-technology (ceramic carrier with a structured platinum layer, covered with a passivation layer)																									
<b>Operating conditions:</b> Unprotected application only in dry environments without any contamination																									
<b>Conformity:</b> 2011/65/EU Restriction of the use of Hazardous Substances Directive (RoHS)																									
Dimensions [mm]																									
<b>Please note</b> Leads are not angled ex works.																									
	<table border="1"> <tr> <td></td> <td>FMA- 2146 2x5x1.3</td> <td>FMA- 2146 2x5x1.0</td> <td>Leads</td> <td>AgPd5</td> <td>NiAu</td> <td>NiPt</td> <td>Pt</td> </tr> <tr> <td>H1 [mm]</td> <td>1.3 ± 0.2</td> <td>1 ± 0.2</td> <td>l [mm]</td> <td>15 ± 1</td> <td>15 ± 1</td> <td>10 ± 1</td> <td>7 ± 1</td> </tr> <tr> <td>H2 [mm]</td> <td>0.65</td> <td>0.4</td> <td>d [mm]</td> <td>0,25</td> <td>0,2</td> <td>0,2</td> <td>0,2</td> </tr> </table>		FMA- 2146 2x5x1.3	FMA- 2146 2x5x1.0	Leads	AgPd5	NiAu	NiPt	Pt	H1 [mm]	1.3 ± 0.2	1 ± 0.2	l [mm]	15 ± 1	15 ± 1	10 ± 1	7 ± 1	H2 [mm]	0.65	0.4	d [mm]	0,25	0,2	0,2	0,2
	FMA- 2146 2x5x1.3	FMA- 2146 2x5x1.0	Leads	AgPd5	NiAu	NiPt	Pt																		
H1 [mm]	1.3 ± 0.2	1 ± 0.2	l [mm]	15 ± 1	15 ± 1	10 ± 1	7 ± 1																		
H2 [mm]	0.65	0.4	d [mm]	0,25	0,2	0,2	0,2																		

## Functional performance

according to DIN EN 60751

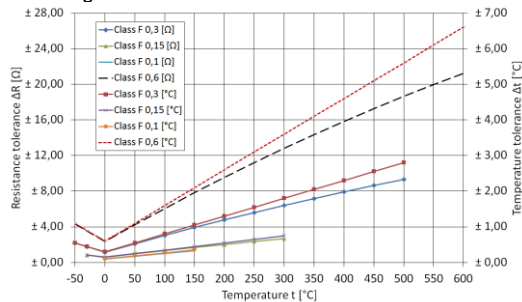

Picture 1: Resistance and temperature tolerances of Pt1000 (Please note - the operating temperature range depends on lead material!)

Temperature range from -50 °C up to 0 °C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2 + C \cdot (t - 100 \text{ °C}) \cdot t^3)$$

Temperature range from 0°C up to +600°C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2)$$

Tolerance classes according to DIN EN 60751:

Class F 0,1 (0°C - +150°C):  $\Delta t = \pm (0.1 + 0.0017 \cdot |t|)$

Class F 0,15 (-30°C - +300°C):  $\Delta t = \pm (0.15 + 0.002 \cdot |t|)$

Class F 0,3 (-50°C - +500°C):  $\Delta t = \pm (0.3 + 0.005 \cdot |t|)$

Class F 0,6 (-50°C - +600°C):  $\Delta t = \pm (0.6 + 0.01 \cdot |t|)$

Whereby:

$R_t$  ... Resistance [Ω] at temperature t

$R_0$  ... Resistance [Ω] at 0 °C

t ... Temperature [°C]

$\Delta t$  ... Permissible temperature deviation at t [°C]

$$A = 3.9083 \cdot 10^{-3} \text{ °C}^{-1}$$

$$B = -5.775 \cdot 10^{-7} \text{ °C}^{-2}$$

$$C = -4.183 \cdot 10^{-12} \text{ °C}^{-4}$$

## Fields of application

- Industrial electronics
- Building automation
- Automotive electronics
- Energy and environmental engineering
- Safety and medical engineering

## Ordering examples

Construction	Class of accuracy	Leads (ø d x l [mm] lead material)	Operating temperature range [°C]
FMA- 2146 2x5x1.3	F 0,15	0.25x15 AgPd5	-50/+400
FMA- 2146 2x5x1.0	F 0,3	0.2x10 NiAu	-50/+400
FMA- 2146 2x5x1.0	F 0,6	0.25x15 AgPd5	-50/+400

Other classes of accuracy and wire lengths are available on request.

# Platinum Temperature Sensor Pt100 FMA 5x5


## Technical Data

Resistance at 0 °C (R <sub>0</sub> )	100 Ω
Temperature coefficient (0 °C up to +100 °C)	3.85 · 10 <sup>-3</sup> K <sup>-1</sup>
Tolerance classes according to DIN EN 60751	<ul style="list-style-type: none"> <li>• F 0,1 (0°C - +150°C)</li> <li>• F 0,15 (-30°C - +300°C)</li> <li>• F 0,3 (-50°C - +500°C)</li> </ul>
Operating temperature range depending on lead material:	
AgPd5, Au-coated Ni-wire	-50 °C up to +400 °C
Pt-coated Ni-wire	-50 °C up to +500 °C (short-time up to +550 °C)
Pt	-50 °C up to +600 °C
Measurement current (DC) at 25 °C	1 mA
Maximal permissible peak current (DC) at 25 °C	3 mA
Insulation resistance	> 10 MΩ
Self-heating at 0 °C	< 0.5 K / mW
Thermal response time	
Flowing water (v = 0.2 m/s)	T <sub>0.5</sub> = 0.07 s, T <sub>0.9</sub> = 0.3 s
Flowing air (v = 1 m/s)	T <sub>0.5</sub> = 8 s, T <sub>0.9</sub> = 30 s
Resistance value [Ω] at	
Temperature	Tolerance class
	F 0,1 [Ω]    F 0,15 [Ω]    F 0,3 [Ω]
0 °C	100 ± 0.04    100 ± 0.06    100 ± 0.12
+100 °C	138.51 ± 0.1    138.51 ± 0.13    138.51 ± 0.3

R <sub>t</sub> measuring point	2 mm from wire end
Maximal Resistance Change at UCT 250 h	< 0.1 %
Specification	DIN EN 60751
Type	Film sensor
<b>Technology:</b> Advanced thin-film-technology (ceramic carrier with a structured platinum layer, covered with a passivation layer)	
<b>Operating conditions:</b> Unprotected application only in dry environments without any contamination	
<b>Conformity:</b> 2011/65/EU: Restriction of the use of Hazardous Substances Directive (RoHS)	
<b>Dimensions [mm]:</b>	
Leads	AgPd5    NiAu    NiPt    Pt
l [mm]	15 ± 1    10 ± 1    10 ± 1    7 ± 1
Ø d [mm]	0,15    0,2    0,2    0,2

## Functional performance

according to DIN EN 60751

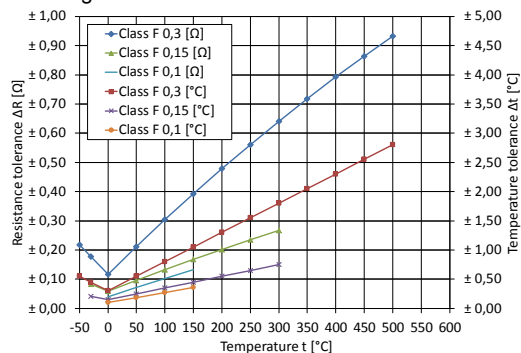

Picture 1: Resistance and temperature tolerances of Pt100 (Please note - the operating temperature range depends on lead material!)

Temperature range from -50 °C up to 0 °C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2 + C \cdot (t - 100 \text{ °C}) \cdot t^3)$$

Temperature range from 0 °C up to +600 °C:

$$R_t = R_0 \cdot (1 + A \cdot t + B \cdot t^2)$$

Tolerance classes according to DIN EN 60751:

Class F 0,1 (0°C - +150°C):  $\Delta t = \pm (0.1 + 0.0017 \cdot |t|)$

Class F 0,15 (-30°C - +300°C):  $\Delta t = \pm (0.15 + 0.002 \cdot |t|)$

Class F 0,3 (-50°C - +500°C):  $\Delta t = \pm (0.3 + 0.005 \cdot |t|)$

Whereby:

R<sub>t</sub> ... Resistance [Ω] at temperature t

R<sub>0</sub> ... Resistance [Ω] at 0 °C

t ... Temperature [°C]

Δt ... Permissible temperature deviation at t [°C]

$$A = 3.9083 \cdot 10^{-3} \text{ °C}^{-1}$$

$$B = -5.775 \cdot 10^{-7} \text{ °C}^{-2}$$

$$C = -4.183 \cdot 10^{-12} \text{ °C}^{-4}$$

## Fields of application

- Industrial electronics
- Building automation
- Automotive electronics
- Process, energy, environmental, safety, medical engineering

## Specification

Article-No.: VMW1-12340921310/B

Type/Construction: Pt100 FMA 5x5



Class of accuracy: F 0,3

Leads (Ø d x l [mm] lead material): 0.15x15 AgPd5

Operating temperature range [°C]: -50/+400

Other: silver plated chip backside

*Other classes of accuracy, wire lengths etc. are available on request.*



UST Umweltsensortechnik GmbH  
is certified according to

